




## The CLASSIC PEDESTAL Range

A range of versatile galvanised steel pedestals with composite or metal outer skins.

## PRODUCT FEATURES

- Hot-dipped galvanised steel internal chassis
- UV stabilised external shell and shell material variants: steel, composite or aluminium
- 360 degree low energy LED lighting
- Fully segregated electric, water and lighting compartments
- Height and width variants (Standard, Midi and Maxi)
- Socket variants: 16amp single phase to 250amp three phase
- Water tap variants: 1/2" to 1"
- Able to accommodate all switching and monitoring management solutions
- Designed for ease of installation and maintenance
- The range also consists of SOS, sanitation, emergency telephone and pier ID pedestals



Internal Electric, Water & Lighting Segregation



UV Stabilised



CE Certified



IP65 Weather Proof



LED Illumination




Strong & Durable

# SPECIFICATIONS

## CHARACTERISTICS

Materials	<b>Head:</b> ABS Granulate Natural Polyethylene <b>Body Internal:</b> Hot-Dipped Galvanised Steel <b>Body External:</b> Powder Coated Aluminium / Aluminium Composite / 304 Stainless Steel BS EN-10204:2004, BS EN 573-3:2013, BS EN 755-2:2016
Dimensions	<b>Standard:</b> A: 750mm, 1000mm B: 885mm, 1135mm C: 205mm D: 185mm E: 135mm <b>Midi:</b> A: 1000mm B: 1135mm C: 270mm D: 240mm E: 135mm <b>Maxi:</b> A: 1000mm B: 1135mm C: 325mm D: 295mm E: 135mm
Operating Temperature	-30°C to +60°C (Installed and Operated Within Multiple Climates from Around the Globe)
IP Rating	Pedestal Rated IP65, Sockets IP44/IP67 As Per Requirements
Compliances	BS7671 Wiring Regulations BS EN 61439-2:2011, BS EN 61439-5:2015 CE Certified Low Voltage Directive 2014/35/EU Electromagnetic Directive 2014/30/EU Corrosion Resistant / Salt Mist Tested Panels ISO 9227 UV Stabilised Flame Retardant to UL94
CE	
Typical Weight (AVG)	12-15kg (Standard 750mm)

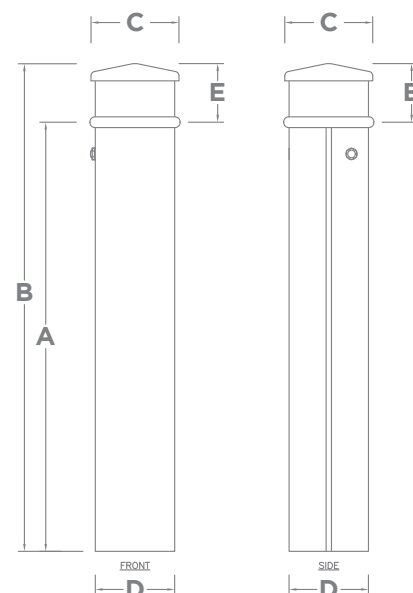

## ELECTRICAL

Sockets	16amp Single Phase to 250amp Three Phase EN60309-2 / EN60309-1
Voltage	230V to 415V
Overload & Fault Current Protection	MCB/RCD or RCBO IEC 60898-1, IEC 60947-1, IEC 61009-1
Input Voltage	230V / 415V

## WATER

Taps	1/2" to 1"
Pressure	3 Bar Limit Controlled, 10 Bar Limit Non-Controlled
Protection	Lagging; 1/2": 22x9mm, 3/4": 28x13mm, 1": 35x13mm
Input	MDPE Coupler
Grade	Brass (UK), Stainless Steel (International)

## LIGHTING

Type	360 Degree Low Energy LED
Rating	2x G9 2.3W 5000k
Protection	MCB

## OPTIONS

- Shell colours and materials
- Branding vinyls
- Electric and water metering
- Switching and control
- TV, telephone and data outlets
- Heat trace tape
- LED Colours

Images are for marketing purposes only and are not contractual © 2023



Head office contact:  
 t: +44 (0) 1205 724754  
 f: +44 (0) 1205 724876  
 rolec@rolecserv.co.uk

Rolec Services Ltd  
 Ralphs Lane, Frampton West  
 Boston, Lincolnshire  
 UK. PE20 1QU

MSDS-0002  
 @RolecMarina  
 www.rolecserv.com